


FD200

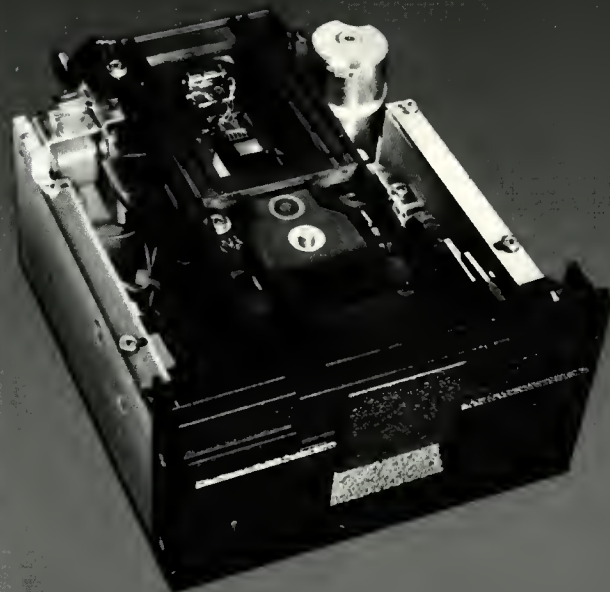

FD250

PERTEC FD200/FD250 Microfloppy Disk Drives

For Low Cost Mass Storage, Depend on Pertec's Microflopies. We've got what you need for OEM applications.

Want a single head and double density? That's our FD200 microfloppy disk drive. Want a double head and double density? We've got that too—in our FD250. If you're not up to double density, both drives can also accommodate single density recording.

Need more storage capacity? High resolution heads and improved read electronics make it possible to record up to 437,500 bytes on the FD250, without flipping the diskette. If that's not enough, try the FD200 for 250,000 bytes, then flip over the 5¼ inch diskette, and record *another* 250,000 bytes.

Want reliability? Our IBM-compatible read/write heads are the very same industry proven heads we've used in thousands of our FD400 and 500 models. What's more, the FD250 has a diskette in-place switch, designed to increase unit life.

Want more than 35 on-line recording tracks? Try our FD200 drive with 40. More? Try the FD250 and get 70.

But we haven't stopped there. Our designers have thought of lots of other ways to give you what you need in microflopies.

For instance, we didn't want you to worry about overseas voltage differences, so both the FD200 and 250 operate with standard 5- or 12-volt dc power supplies. We didn't want you to worry about spares and repairs, so both models' interface electronics have been reduced to a single PCBA. Plus, the FD250 uses a special dual-head mechanism that will decrease your media and head wear.

If you need more information, talk to your local Pertec salesman. He'll tell you more about why our microflopies are the best choice in low cost mass storage. Depend on it.

See reverse for specifications.

FD200/FD250 Microfloppy™ Disk Drive Specifications

Media		Industry-compatible 5-1/4-inch diskette
Tracks per inch		48
Number of Tracks		FD200: 40 tracks FD250: 70 tracks
Read/Write Track Width		0.047 mm (0.012 inch)
Physical		
Height		82.55 mm (3.25 inches)
Width		146.05 mm (5.75 inches)
Depth		203.2 mm (8.0 inches)
Weight		1.45 kg (3.2 pounds)
Environment		
Temperature Operating		10°C to 42°C (50°F to 110°F)
Non-operating		-40°C to 71°C (-40°F to 160°F)
Relative Humidity Operating		20% to 80%
Non-operating		5% to 95% (non-condensing)
Performance		
Seek Time		25 msec track to track
Head Settling Time		10 msec (last track addressed)
Head Loading Time		35 msec (maximum)
Error Rate (maximum)		1 per 10 ⁹ recoverable, 1 per 10 ¹² non-recoverable
Head Life		20,000 hours (normal use)
Media Life		3 million passes on a single track
Disk Speed		300 rpm ±1.5%
Instantaneous Speed Variation		±1.0%
Start/Stop Time		1 second (maximum)
Recording Parameters		
Transfer Rate		125/250K bits/second
Recording Density (inside track)		2768/5536 bpi
Maximum Bytes per Disk ¹		FD200: 125,000/side (single density)/ 250,000/side (double density) FD250: 218,750 (single density)/ 437,500 (double density)
Maximum Bytes per Track ¹		3125/6250
Recording Mode		FM single/MFM double density
Power Requirements		
		+ 12v dc ±0.6v, 2 amps maximum 5v dc ±0.25v, 0.8 amps maximum

¹unformatted



PERTEC DIVISION

9600 Irondale Avenue, Chatsworth, California 91311
Phone (213) 999-2020 / TWX 910-494-2093